



RCA 22" DECK215R HDTV Screen Replacement

This guide explains how to remove the screen from the plastic housing of the RCA DECK215R HDTV.

Written By: Patrick Soper



INTRODUCTION


If your screen is cracked or has dead pixels and is in need of replacement, this guide explains how to remove the screen from the TV.




TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [Phillips #2 Screwdriver](#) (1)
-


Step 1 — Removing the Stand

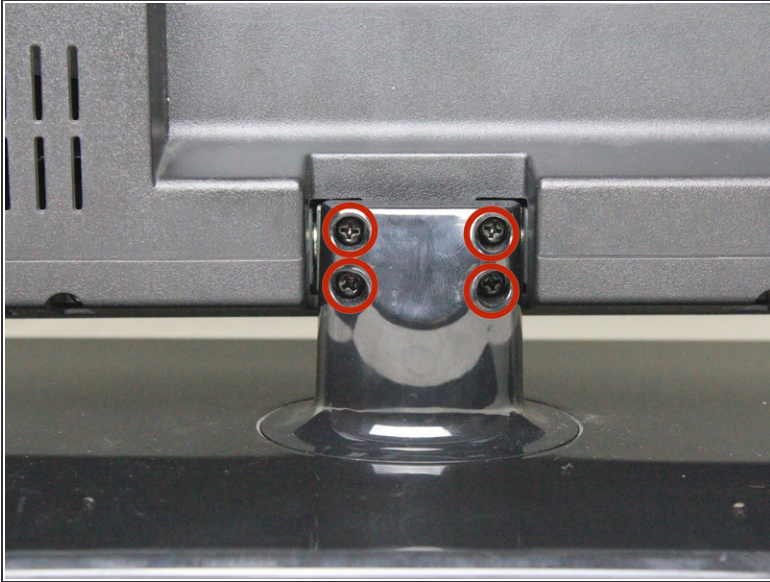

 Before disassembling your television, ensure that all cables are unplugged from their power source to avoid serious injury or death from electrocution.

- Lay the TV flat with the screen facing down.
- Remove the four, 12mm Phillips #2 screws from the back of the TV stand. Support the TV from underneath as you remove the screws, so the bottom does not fall on the table.
- Remove the stand by lifting it away from the TV's backing.

Step 2 — Removing the Back Panel

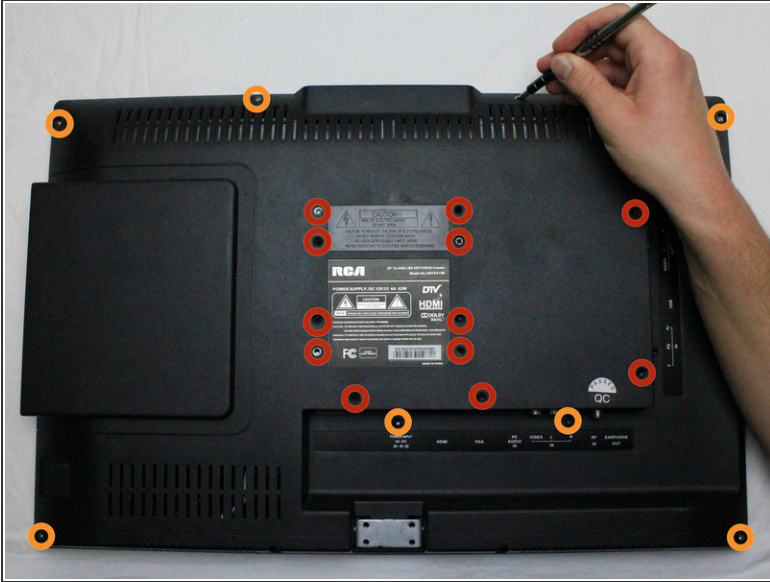


- Remove the twelve, 6mm Phillips #2 screws from the middle of the TV's rear casing.
- Remove the seven, 9mm Phillips #2 screws from the outer edge of the TV's rear casing.
- While holding the screen down, pull the back panel up slowly, ensuring that you do not forcibly disconnect the remaining ribbon cable.

Step 3 — Locate Pin




- Position the television to where the back panel is resting on the table and the screen is vertical.
- Peel the tape covering the ribbon cable horizontally.

Step 4

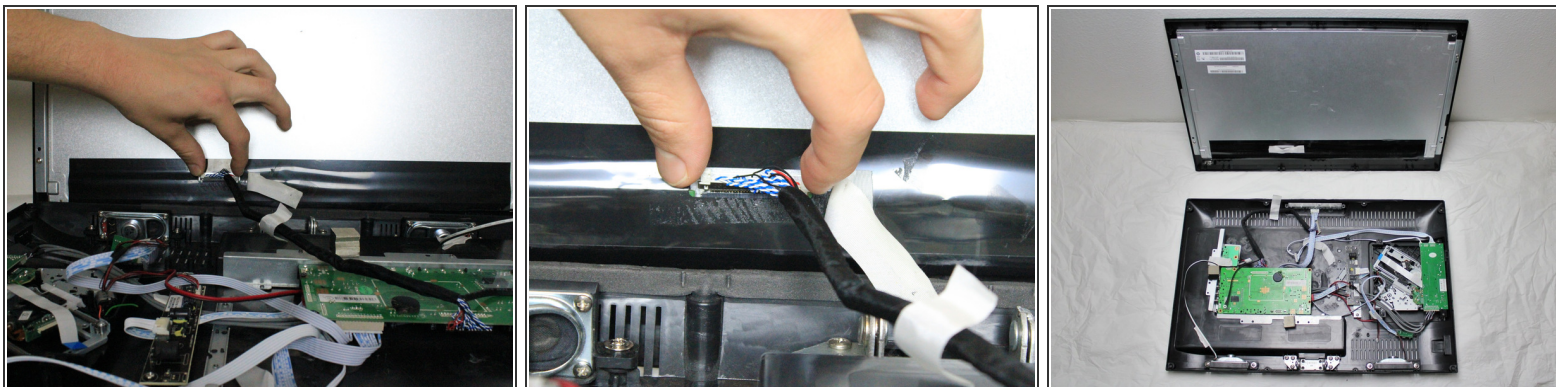

- Pinch the clamps on both sides of the ribbon cable casing to detach it from the screen panel.
- Remove the screen to isolate the back panel.

Step 5 — Remove Screws

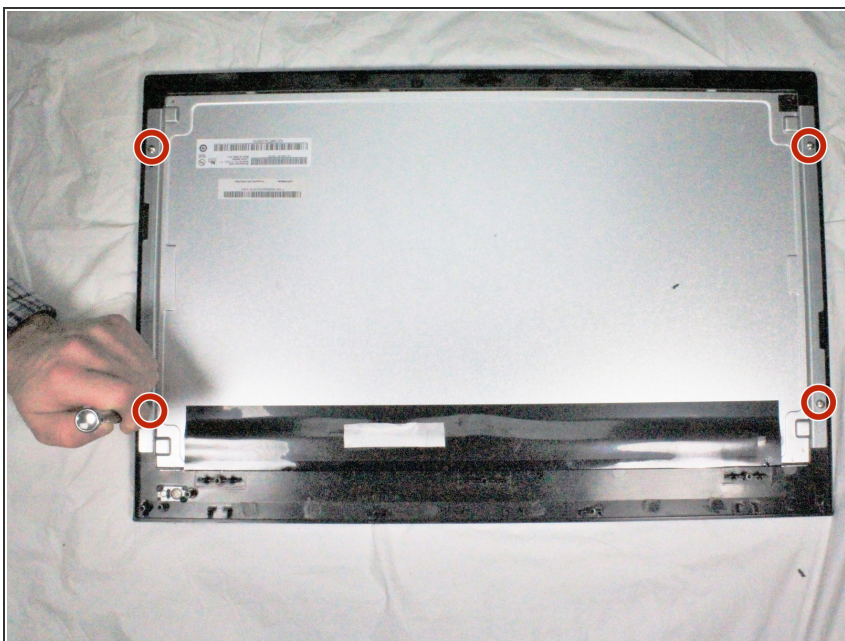

- Remove the four, 12mm Phillips #2 screws from the outer edge of the back of the screen panel.

Step 6 — Remove the Screen from the Frame



- Lift up the screen to remove it from the plastic frame.

Step 7 — Remove Brackets from the Side of the Screen



- Remove the two, 5mm Phillips #2 screws from the metal bracket attached to the horizontal side of the TV and take the bracket off.
- Repeat this process on the other side of the TV to completely isolate the screen.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-26 12:22:21 AM.